

RLK8-410B4-NVR-Kit-IP-Camera-Specifications		
	Model	B500(5MP)/B400(4MP)
Note:	The cameras of the kit cannot work without the NVR.	
Camera	Image Sensor	1/2.7" CMOS Sensor (B500); 1/3" CMOS Sensor (B400)
	Effective Pixels	B500: 2560x1920(5.0 Megapixels); B400: 2560x1440 (4.0 Megapixels)
	Lens	f=4.0 mm Fixed, F=2.0
	Angle of View	Horizontal: 80°, Vertical: 58°(B500); Vertical: 42°(B400)
	Day/Night Mode	Auto Switchover
	Min. Illumination	0 Lux (With IR Illuminator)
	IR Distance	30 Meters (100ft)(LED: 18pcs/14mil/850nm)
	Backlight Compensation	Support
	Noise Reduction	3D DNR
Video	Compression	H.264
	Resolution	B500: Mainstream: 2560x1920, 2560x1440, 2048x1536, 2304x1296; Substream: 640x480
		B400: Mainstream: 2560x1440, 1080p, 720p; Substream: 640x360
	Bitrate	B500: Mainstream: 1024Kbps~8192Kbps; Substream: 64Kbps~512Kbps
		B400: Mainstream: 1024Kbps~6144Kbps; Substream: 64Kbps~512Kbps
	Frame Rate	Mainstream@30fps, Substream@7fps
Audio	Interface	Built-in Microphone
Network	Interface	One 10M/100Mbps RJ45
General	Power Supply	DC12V & PoE (IEEE 802.3af 48V Active)
	Power Consumption	<10W(B500); <8W(B400)
	Working Environment	-10°C~+55°C (14°F~131°F), Humidity: 10%~90%
	Ingress Protection	IP66
	Dimension	Φ67x186 mm
	Weight	350g(B500); 415g(B400)
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .


	RLK8-410B4-NVR-Kit-NVR-Specifications	
	Model	RLN8-410
Hardware	Hardware	V2
Video/Audio Input	IP Video Input	PoE IP camera x 8
	Audio Input	Cameras with built-in mic
Video/Audio Output	Video Output	VGA, HDMI
	Display Resolution	HDMI: 3840*2160, 1920*1080, 1440*900, 1280*1024, 1280*720, 1024*768
		VGA: 1920*1080, 1440*900, 1280*1024, 1280*800, 1280*720, 1024*768
	Audio output	1-channel, RCA
Decoding	Video Format	H.264, H.265
	Live View/Playback Resolution	3840*2160/2560*1920/2560*1440/2048*1536/2304*1296/1080p/720p
	Synchronous Playback	Up to 4 channels
HDD	SATA	1 x SATA interface (1 x Seagate 2TB HDD included)
	External HDD	1 eSATA interface for HDD
	Capacity	Up to 8TB (Max. 4TB capacity for each HDD)
External Interface	USB Interface	2 x USB 2.0
	Network Interface	RJ45,10M/100M Ethernet, 8 Network Ports for IP camera, 1 Giga Network Port for LAN/WAN
		8 Independent 100 Mbps PoE Network Interfaces
PoE	Max. Power Per Port	25W
	Supported Standard	IEEE 802.3af/at
Network	Network Protocols	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
	Browsers Supported	IE, Edage, Firefox, Chrome, Safari
	OS Supported	PC: Windows, Mac OS; SmartPhone: iOS, Android
	Max. User Access	20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
General	Power Supply	DC 48V/2A
	Power Consumption	<10W (without HDD&PoE)
	Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
	Dimensions	260 x 41 x 230mm
	Weight	1.4kg



① Mount ② Metal Aluminum Case ③ 18 IR LEDs ④ High Definition Lens (f=4.0mm) ⑤ Daylight Sensor



① USB Port ② Power LED/HDD LED ③ Control Panel

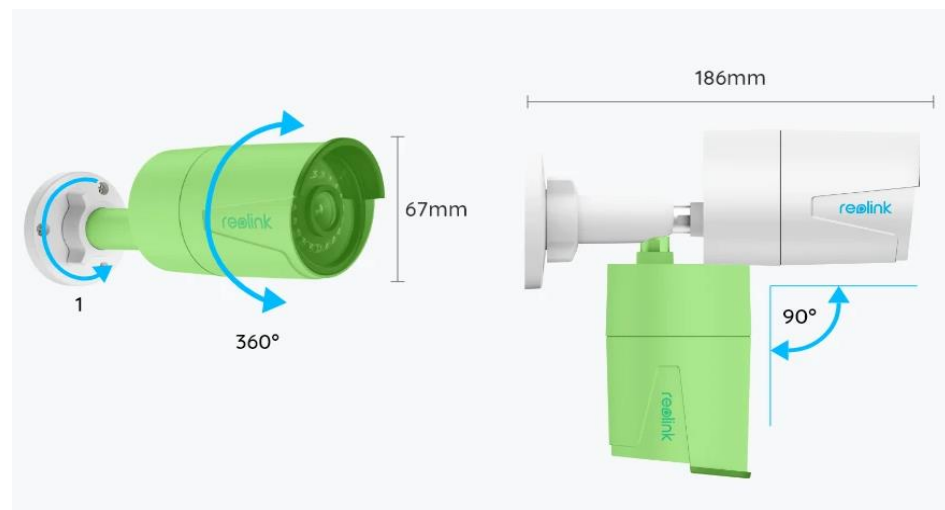

1. Unscrew it (counterclockwise) to loosen the bracket and adjust the camera in any direction.
2. After adjustment, twist it back to fix the camera.



① Power ② Reset Button ③ Network ④ Waterproof Lid



① On/Off Switch ② eSATA ③ RJ45 ④ Power Input
⑤ Audio Out ⑥ USB Port ⑦ HDMI Port ⑧ VGA Port ⑨ Network