



Model: UH407

7-In-1 HDMI SD/TF 4K USB-C Hub

2K
144Hz


4K
60Hz



[Datasheet](#)

Highlights

Plug-and-Play USB-C dongle for extending a PC with HDMI, USB-C, USB-A, and SD/TF slots, ideal for photographers, business people, lecturers, and school students.

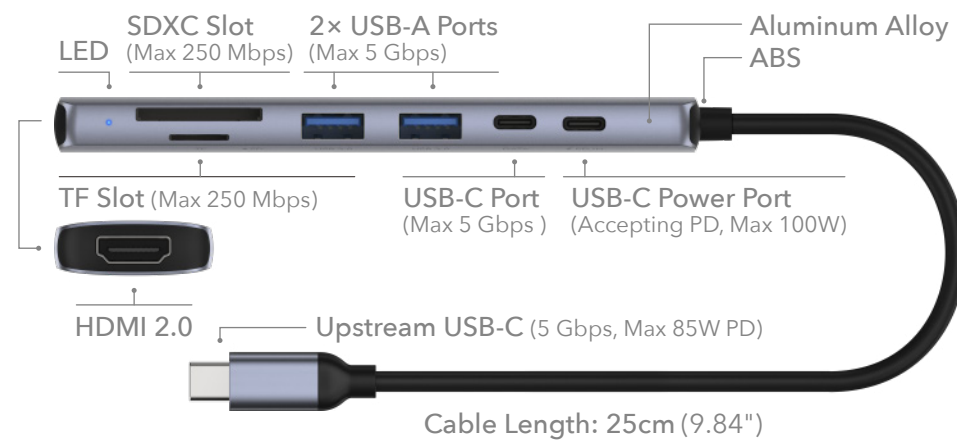

- 1 × HDMI 2.0, 4K 60Hz, 2K 144Hz
- 1 × 5 Gbps Upstream PD USB-C Male
- 2 × 5 Gbps USB-A 3.2 Gen 1
- 1 × 5 Gbps USB-C 3.2 Gen 1
- 1 × TF Slot, 1 × SDXC Slot
- 1 × USB-C Receiving 100W PD
- 64 g (2.26 oz.)
- 130×32×11 mm (5.12×1.26×0.43")
- PC/Mac/iPad/iPhone/Android/Nintendo

Hardware Features

Interfaces	Upstream Port	1 × USB-C 3.2 Gen 1 Port (5 Gbps)
	Video Output	1 × HDMI 2.0
	Video Output Resolutions	4K (4096×2160) 60 Hz
		2K (2560×1440) 144 Hz
		1080P (1920×1080) 240 Hz
	Video Output Modes	Extend, Mirror
		Android phone supports mirror mode only
USB Ports	1 × USB-C 3.2 Gen 1 Port (5 Gbps)	
	2 × USB-A 3.2 Gen 1 Ports (5 Gbps)	
Memory Card Slots	1 × SD Card Slot (250 Mbps)	
	1 × TF Card Slot (250 Mbps)	
Power Input	USB-C Port	
LED	Power	
Power	Power Methods	DC / PD
	DC	5~20V 0~5A
	Max Power Consumption (W)	100W if powered by a PD Adapter
		15W if powered by the host client's USB Power
Idle Power Consumption (W)	0.4W	



Hardware Features

Physical	Color	Silver Gray Color
	Casing	Aluminum ABS
Requirements	Hardware Requirement	Requires a USB-C 3.2 Gen 1 / USB4 / Thunderbolt 3/4 port on the host device
	Compatible OS	Windows 7 or later
		macOS 10.12 or later
		Ubuntu LTS 18.04 or later
Android 5 or higher		
	iPadOS	
	iOS	
	Driver Installation	Driver Free
Reliability	Environment	Operating Temperature: 0~40 °C (-32~104 °F)
		Storage Temperature: -20~70 °C (-10~158 °F)
		Operating Humidity: 20~85% RH non-condensing
		Storage Humidity: 10~90% RH non-condensing

Hardware Features

Mechanical	Product Weight	64 g (2.26 oz.)
	Dimension	Main Part :
130×32×11 mm		
5.12×1.26×0.43 inches		
Cable:		
	250mm	
	9.84 inches	