



Standard

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GB/T3047.2-92 standard.

Feature

- 19 inch width standard;
- Removable Side Panels, side locks optional;
- Knock off hole for entering cable on both top cover, bottom panel,real panel
- Turning angle of front door is over 180 degrees
- Easy mounting installation
- Unassembled package saving shipping space
- fan,shelf,PDU are optional

Loading Capacity

800KG

Degree of Protection

IP20


Material

SPCC Cold Rolled Steel
Thickness:2.0mm-1.2mm-1.0mm

Surface Finish:

Powder coating


Cabinet details



Fixed glass by Screws not by glue



Glass front door



Zinc plated mounting profile




Removable side panels
(Side lock optional)




Cable entrance on rear panel



Ground wire optional

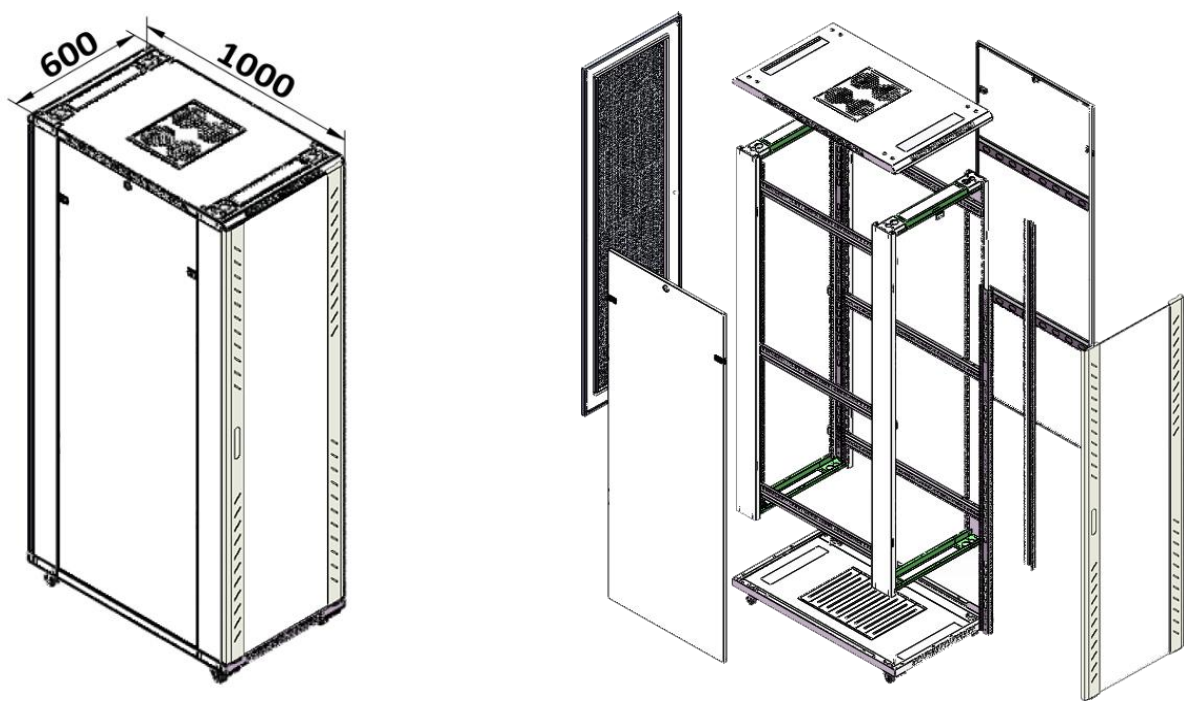

Main dimension(42U 600 x 1000mm)

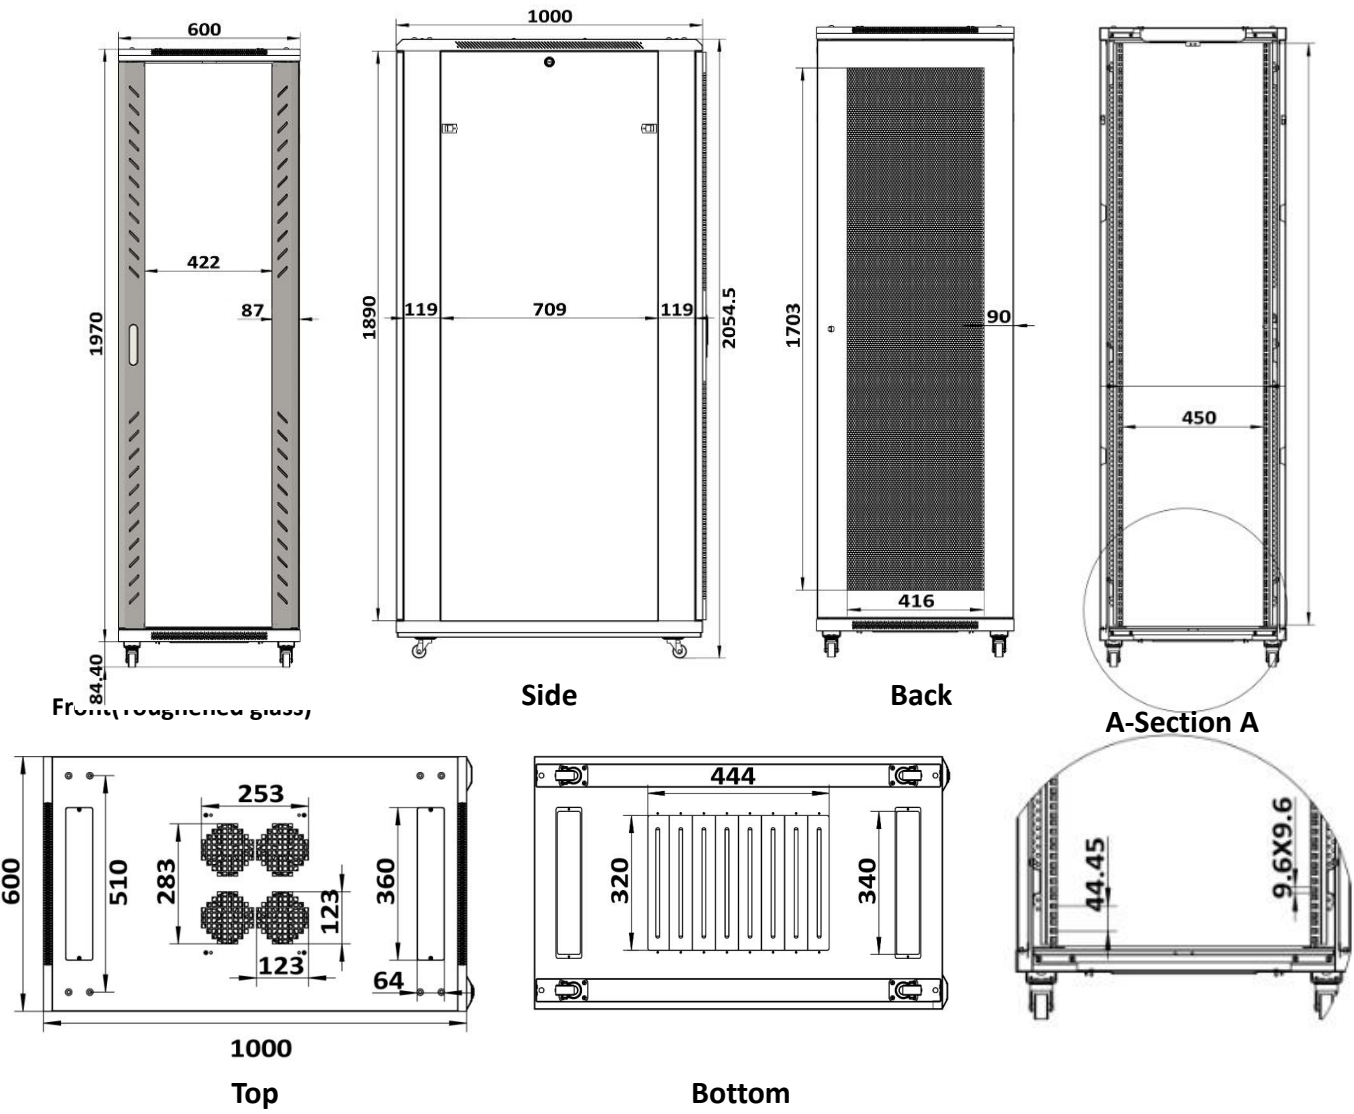

Specification

Model No.	Capacity	Width	Depth	Height	Volume	Standard accessories
	(U)	(mm)	(mm)	(mm)	(CBM)	Fan,PDU and shelf will be optional
FS.6618	18	600	600	987	0.131	
FS.6818			800		0.152	
FS.6018			1000		0.182	
FS.8818		800	800		0.212	
FS.8018			1000		0.240	
FS.6622	22	600	600	1164	0.146	
FS.6822			800		0.169	
FS.6022			1000		0.202	
FS.8822		800	800		0.238	
FS.8022			1000		0.267	
FS.6627	27	600	600	1387	0.166	
FS.6827			800		0.189	
FS.6027			1000		0.227	
FS.8827		800	800		0.268	
FS.8027			1000		0.299	
FS.6632	32	600	600	1609	0.186	
FS.6832			800		0.211	
FS.6032			1000		0.252	
FS.8832		800	800		0.301	
FS.8032			1000		0.333	
FS.6637	37	600	600	1832	0.229	
FS.6837			800		0.265	
FS.6037			1000		0.315	
FS.8837		800	800		0.364	
FS.8037			1000		0.405	
FS.6642	42	600	600	2054	0.248	
FS.6842			800		0.285	
FS.6042			1000		0.339	
FS.8842		800	800		0.394	
FS.8042			1000		0.437	
FS.6647	47	600	600	2276	0.291	
FS.6847			800		0.339	
FS.6047			1000		0.402	
FS.8847		800	800		0.457	
FS.8047			1000		0.509	

Main Parts

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Frame	2	Piece	SPCC cold rolled steel t1.0	Powder coated	
2	Side panel	2	Piece	SPCC cold rolled steel t1.0	Powder coated	
3	Top cover	1	Piece	SPCC cold rolled steel t1.0	Powder coated	
4	Bottom panel	1	Piece	SPCC cold rolled steel t1.0	Powder coated	
5	Mounting profile	4	Piece	SPCC cold rolled steel t2.0	Zinc plated	
6	Mounting rail	4/6	Piece	SPCC cold rolled steel t1.2	Powder coated	
7	Front door	1	Piece	5MM toughened glass door/SPCC t1.2	Powder coated	
8	Back door	1	Piece	Single metal mesh door t1.2	Powder coated	
9	Castors	4	Piece	2pcs with brake		
10	Leveling feet	4	Piece			
11	Lock	2	Piece	Front and rear door with handle lock		with 2 keys
12	M6 Square nut	30	Piece	Stainless Steel	Color Zinc	
13	M6 B-head screw	30	Piece	Stainless Steel	Color Zinc	
14	Allen wrench	1	Piece	Stainless Steel	Color Zinc	

Definition of door

Model No.	Front door	Rear door
FS	Toughened glass door with round vented border(Handle Lock)	Mesh vented door(small round lock)
	Toughened glass door (small round lock)	Solid metal door(small round lock)
FP	Mesh vented door	Mesh vented door(small round lock)

Remark:If choose split rear door will use handle lock




Color

RAL9004	RAL7035
black	grey
	

Definition of Ornament strip color for toughened glass door

Blue	Red
	

Unassembled packing details(3 cartons)

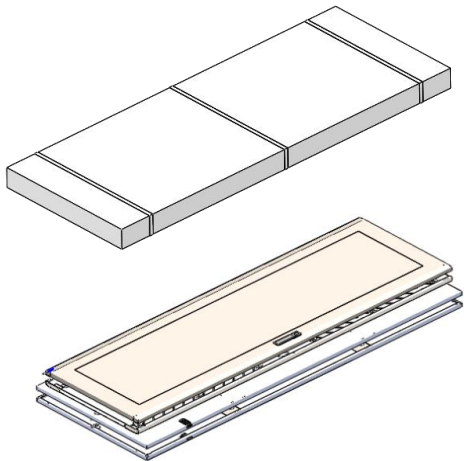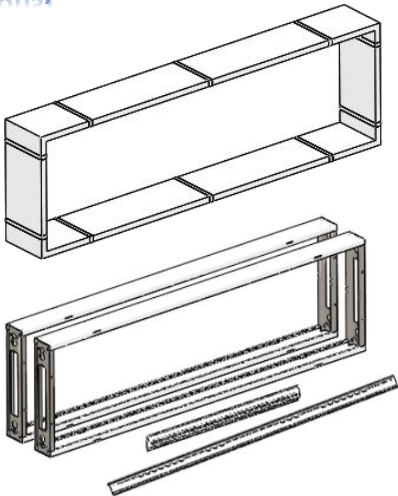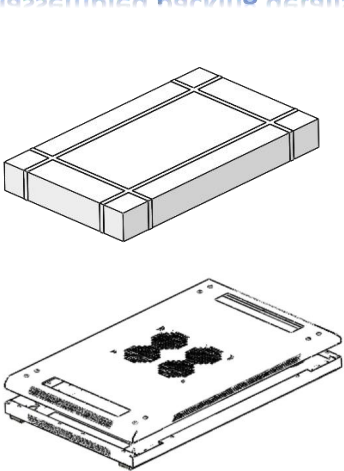

Carton 1:top cover+bottom panel

Carton 2: Cabinet frame
Mounting profile

Carton 3: Doors+side panels